



SECTION A-A

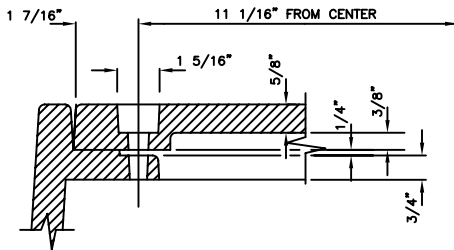

BOLT-DOWN DETAIL




COVER SKID DESIGN DETAIL

NOTES:

1. USE WITH THREE LOCKING BOLTS 5/8"-11 NC STAINLESS TYPE 304 STEEL SOCKET HEAD (ALLEN HEAD) CAP SCREWS 2" LONG. DRILL HOLES SPACED 120° AT 11 1/16" RADIUS.
2. MATERIAL IS DUCTILE IRON ASTM A536 GRADE 80-55-06
- ③ DRILL THREE 1 INCH HOLES SPACED AT 120 AND 9 1/2" RADIUS.



Public Works
Planning
and
Development
Services



Locking Manhole Cover

720

NOT TO SCALE

Revision Date
December 2006